

RPS1200

CONTAINER ENERGY STORAGE
1.2 MWh For Large Scale Energy Storage



Powerful FEATURES



Fail-Safe Design

UL tested for deployment in and around occupied spaces



100% Electric

Proven in the harshest applications



Zero Emissions

Safe, reliable, and versatile source of zero emissions portable power



Minimal Noise

Silent energy has never sounded so good

★ KEY BENEFITS

- Optimize energy use by deploying stored energy during high-priced peak demand periods and recharging during off-peak times, reducing overall energy costs.
- The RPS1200 ensures uninterrupted backup power during blackouts or brownouts, seamlessly maintaining customer operations.
- The installed RPS1200 offers a low-maintenance, customizable energy storage solution for regular operations.
- The RPS1200 seamlessly integrates with various green energy sources like PV, wind, and generators for enhanced sustainability.

★ SAFETY

- All battery packs equipped with passive Fail-Safe thermal management and anti-propagation technology to prevent Li-Ion battery fire.
- Fail-Safe technology allows for unique permitting opportunities including BESS in and around occupied spaces and critical equipment.
- RPS1200 includes integrated HVAC and gaseous fire suppression system.



Bluebonnet POWER

www.BluebonnetPower.com

Energized by Viridi®



PHYSICAL PARAMETERS

Length..... 238.5" (in)

Width..... 113" (in)

Height 114" (in)

Weight..... approx 48,000 lbs

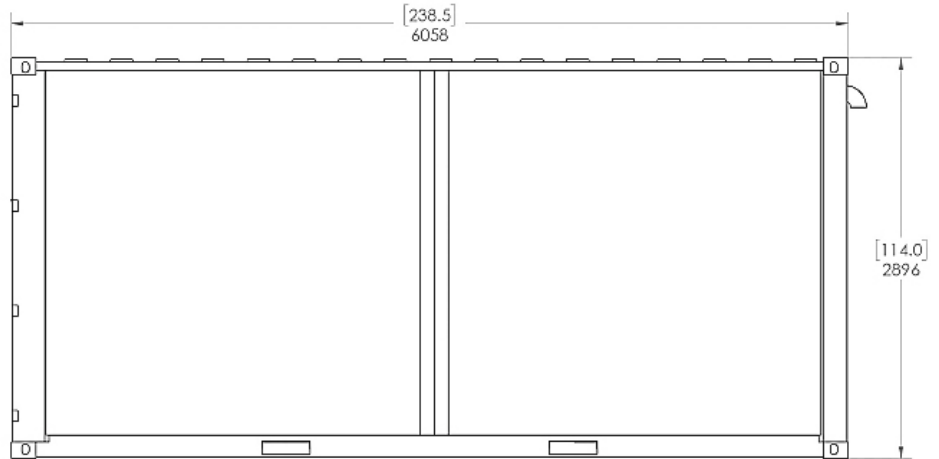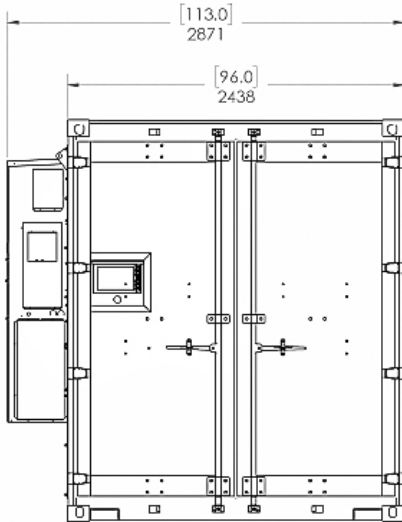

VPP OPERATION

- Parallel multiple RPS1200 together into an intelligent microgrid
- Viridi BEMS AI-controlled Energy Management Platform optimizes facility energy usage to cut costs and maximize decarbonization efforts (optional add-on consisting of external hardware)

CERTIFICATIONS

- UN 38.3 (cell/module)
- UL 1642 (cell)
- UL 1973 (pack tested, listing pending)
- UL 9540A (cell/module/pack tested)
- UL 1741 & IEEE 1547
(Sinexcel PWS2-30P-NA Inverter)

PERFORMANCE

480V 3-phase Max Continuous Power¹

- 240kW Charge
- 240kW Discharge

Battery System

- 1,174.4kWh Nominal
- 1041.8kWh Usable (DC) at 90% DOD
- Approximate Charge and Discharge Durations:
 - 240kW for 4.23hrs
 - 120kW for 8.46hrs
 - 60kW for 16.92hrs
- 4,000 Cycles at Usable Capacity²

¹ Operating temperature range mirrors battery cell specifications. The Battery Management System (BMS) is programmed to manage the pack utilization rate to control the internal pack thermal conditions and prevent operation outside of pack interior temperature limits, which can be tailored for different applications/installations.

The BMS communicates applicable operating conditions continuously via CAN bus to the inverter and/or system controller.

² Cycle life can be optimized for individual applications and operating conditions (depth of discharge, duty cycle, temperature, charge/discharge rate).

FOR MORE INFORMATION

sales@bluebonnetpower.com

★ (469) 673-5698



www.BluebonnetPower.com

Energized by Viridi®